
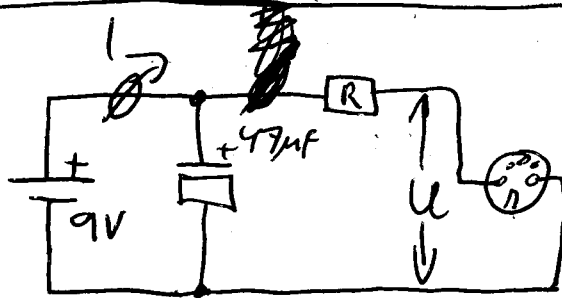


UC-85 Seite 1


VEB Mikrodrehstuhl
 Wilhelm Pieck Mühlhause
 074261

20070526

Buchse am Drehstuhl






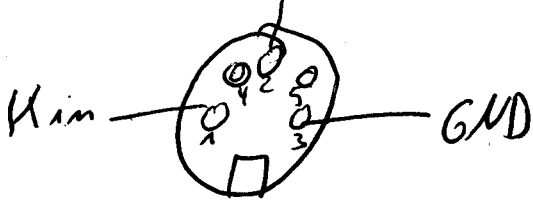


Stromverbrauch			
R = 220 Ω	U = 8.15V	I = 0.6 mA	Leerlauf
	8.16V	I = 0.76 mA	eine Taste gedrückt
	8.0V	I = 1.08 mA	viele Tasten gedrückt
R = 1k Ω	U = 7.84V	I = 0.55 mA	Leerlauf
	7.67V	I = 0.67 mA	eine Taste
	7.4V	I = 0.9 mA	viele Tasten

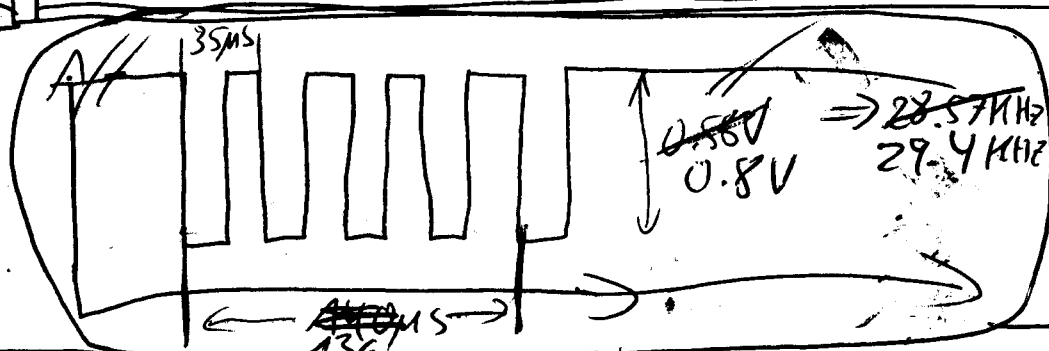

$$f_0 = \frac{1}{\pi \sqrt{LC}}$$

$$\Rightarrow C = \frac{1}{4\pi^2 f_0^2 L} = \frac{3.1 \cdot 10^{-11}}{L}$$

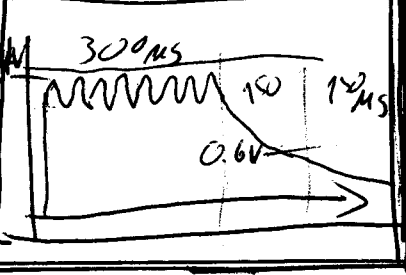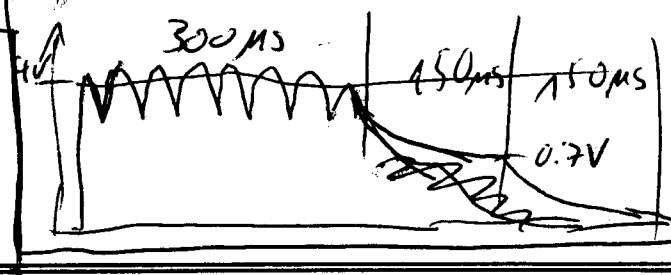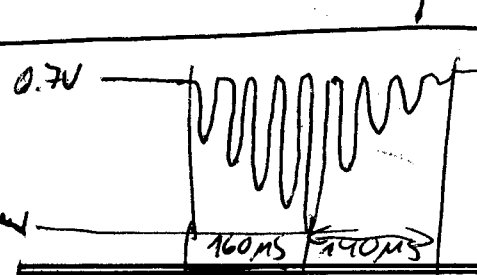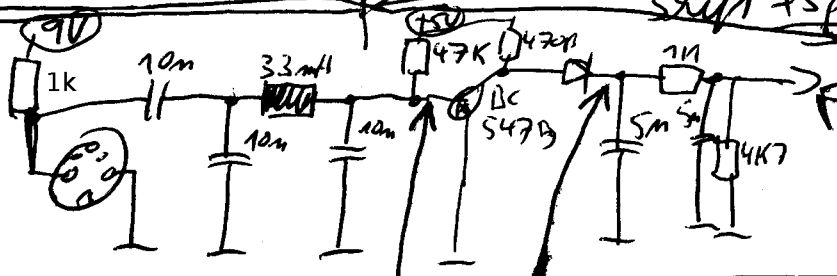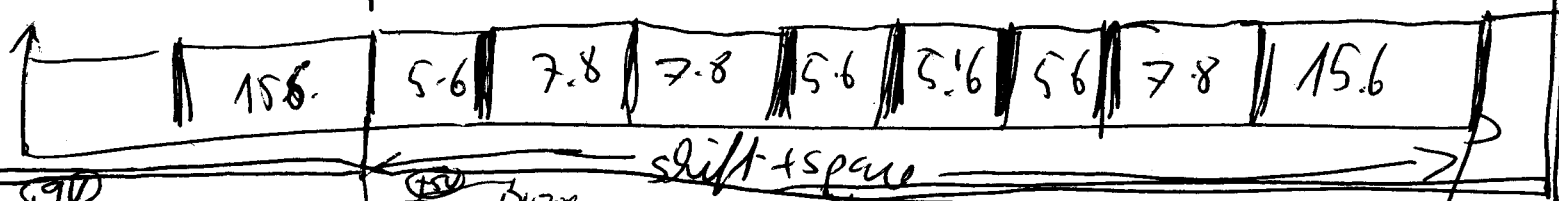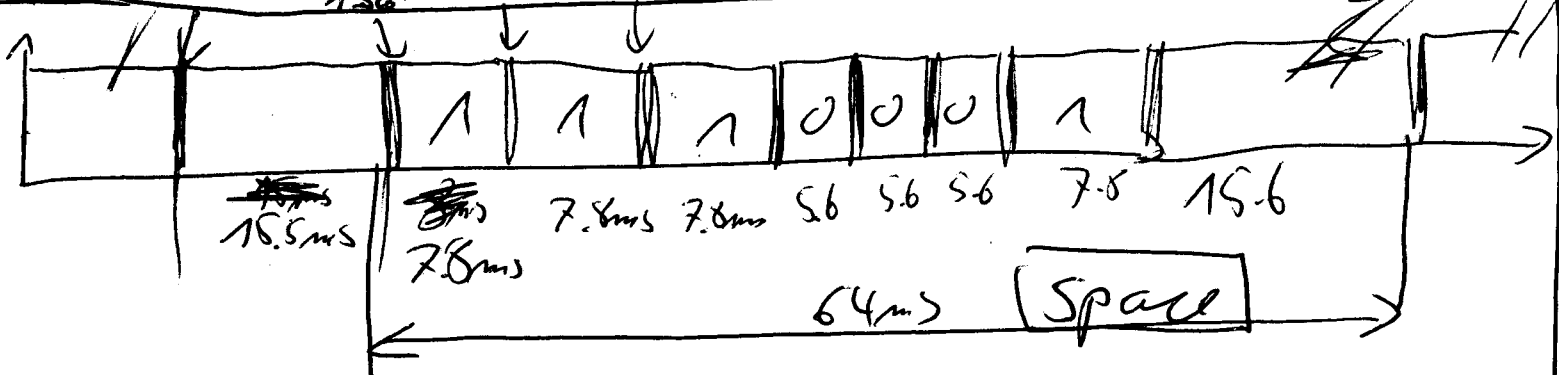

MC 85 5010 2

2007-06-03

A	11 0000	03	Q	1 0 0 0 1 1 1	71	1	1 0 1 0 1 1 1	75
B	00 0001	5F	R	1 0 0 0 0 1 1	61	2	1 0 1 0 0 0 0	05
C	1 1 1 1 0 1 1	6F	S	1 1 0 0 1 0 0	13	3	1 0 1 0 1 0 0	15
D	1 1 0 0 0 1 1	63	T	1 0 0 0 0 1 0	21	4	1 0 1 0 0 1 1	65
E	1 0 0 0 1 0 0	11	U	1 0 0 0 1 1 0	31	5	1 0 1 0 0 1 0	25
F	00 1 1 1 0 1	23	V	1 1 1 1 0 1 0	2E	6	1 0 1 0 1 0 1	55
G	1 1 0 0 1 0 1	53	W	1 0 0 0 0 0 0	01	7	1 0 1 0 1 1 0	35
H	1 1 0 0 1 1 0	33	X	1 1 1 1 1 0 0	1F	8	1 0 1 0 0 0 1	45
I	1 0 0 0 0 0 1	41	Y	1 1 1 1 0 0 0	0F	9	1 1 0 1 1 1 0	35
J	1 1 0 0 0 0 1	43	Z	1 0 0 0 1 0 1	51	0	1 1 0 1 0 1 0	26
K	1 0 0 1 0 0 1	49	[1 1 1 0 1 0 0	17	F1	1 0 1 1 1 1 1	7d
L	1 0 0 1 1 0 1	59	+	1 0 0 1 0 1 1	69	F2	1 0 1 1 0 0 0	0d
M	1 1 1 1 0 0 1	4F	-	1 1 1 0 0 1 1	67	F3	1 0 1 1 1 0 0	1d
N	1 1 1 1 1 1 0	3F	,	1 1 0 1 0 0 1	4b	F4	1 0 1 1 0 1 1	6d
O	1 1 1 0 1 1 0	37	.	1 1 0 1 1 0 1	5b	F5	1 0 1 1 0 1 0	2d
P	1 1 1 0 0 1 0	27	/	1 1 0 1 0 1 1	6b	F6	1 0 1 1 1 0 1	5d
BRN	1 0 1 1 1 1 0	3d	:	1 1 0 1 1 0 0	15	↑	1 0 0 1 1 1 1	79
STOP	1 0 1 1 0 0 1	4d	=	1 1 0 1 0 0 0	0b	↓	1 1 1 0 1 1 1	77
INS	1 0 0 1 1 1 0	39	caps	1 1 0 0 1 1 1	73	←	1 1 1 0 0 0 0	07
DEL	1 0 0 1 0 1 0	29				→	1 1 0 1 1 1 1	7b
CLR	1 0 0 1 1 0 0	19	space	1 1 1 0 0 0 1	47	↺	1 1 1 1 1 1 1	7F
HOME	1 0 0 1 0 0 0	09						

0 → 5.6ms 1 → 7.8ms LSBF